

Outdoor enclosures type 35SA R for communication networks Locking system type SA7R and SA10R



February 2024

The 35SA family



Doors

All enclosures have lift off doors; these can easily be removed for access during installation or maintenance works.

Lock Protection

Standard lock protection across the range is via Ruko type 205 mounted in a stainless steel housing.

Features:

- Built-in louvres for natural ventilation
- Enclosures have lift-off doors for simple and user-friendly access and hinged doors on large enclosures with louvres
- Insulated top section - avoids condensation damage to vital equipment
- Different types of backboards available
- Root for in-ground installation included on all models
- Unique for installation of CATV equipment

Approvals:

- Enclosure according to EN 62208
- IP 34D according to EN 60529
- IK 10 according to EN 62262

General information type 35SA



triarca

- **Outdoor enclosures for communication networks**
- **Type 35 SA enclosures are supplied with integrated root and condensation block as standard**
- **Five sizes enclosures have a lift of door in the front with a type Ruko lock cylinder (photo right)**
- **The 35 SA family comprises of 7 different sizes. Two largest sizes with hinged doors.**
- **Built in louvers for natural ventilation**
- **Different type of back boards available**
- **Constructed in 1,5 mm high quality, low-carbon galvanised steel**
- **Surface treatment with polyester coating RAL 7037 or standard green (similar to RAL 6014)**




Type 35SA-7R


Part number:

235701 – RAL 7037 (grey)

235706 – standard green (similar to RAL 6014)

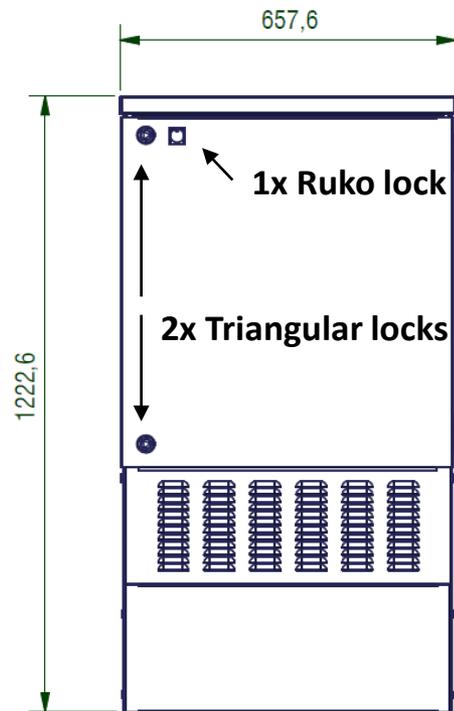

- Solution with one hinged door
- 2x single cam locking system triangular
- Cylinder lock protected with flap
- Louvres for extra ventilation
- One compartment in enclosure
- Earthing point
- Weight 54 kgs
- 4 pcs. on a pallet

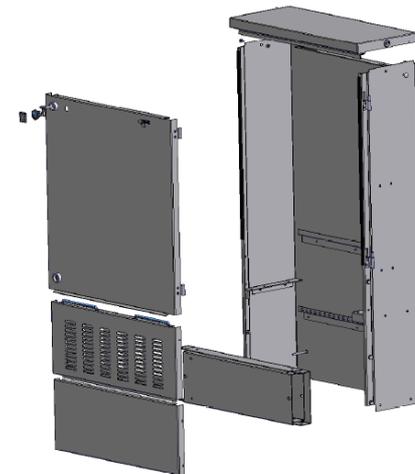


Type 35SA-10R

Part number:

235801 – RAL 7037 (grey)

235806 – standard green (similar to RAL 6014)

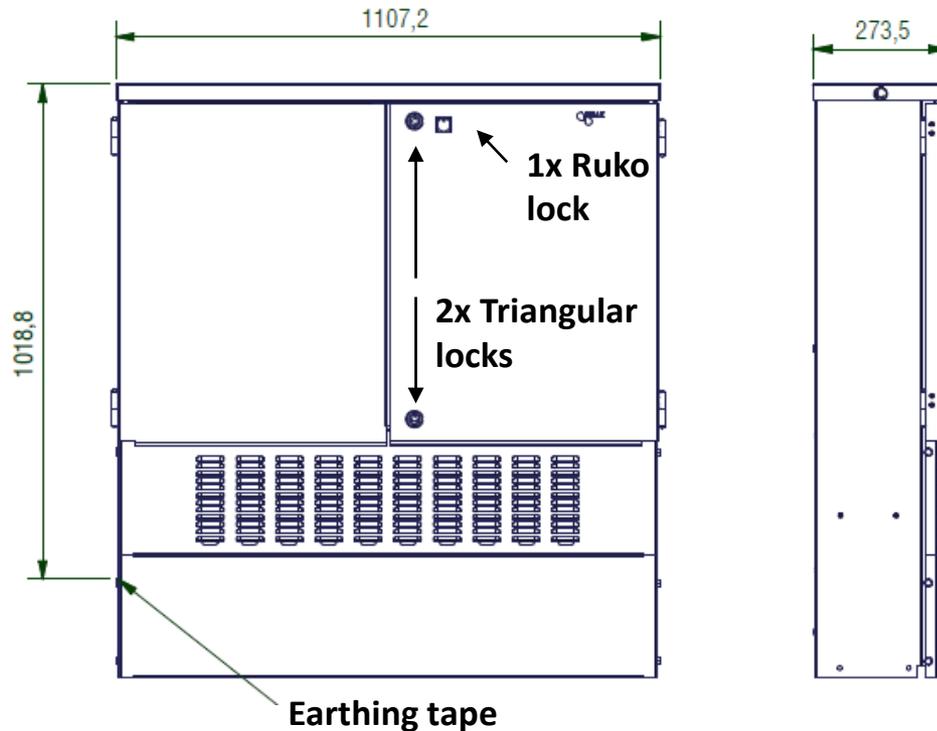

- Solution with two hinged door**
- 2x single cam locking system - triangular**
- Cylinder lock protected with flap**
- Louvres for extra ventilation**
- One compartment in enclosure**
- Earthing point**
- Weight 83 kgs**
- 3 pcs. on a pallet**



Ruko key